

JO BEAU M600 7" CHIPPER



Compact: Only 31.5 inches wide, yet built to devour 7-inch branches with ease.

High performance: 40 HP Vanguard EFI engine delivers relentless torque and smooth operation.

Maximum efficiency: Wide 26.8" x 24.4" feed opening with hydraulic infeed and auto anti-stress system.

Total control: Wireless remote for driving, track adjustment, and infeed height — full command at your fingertips.

Unmatched stability: Exclusive Stabilizing X-Tracks™ keep the machine level and secure, even on slopes.



CONTACT US

Miniloaders LLC
Cincinnati OH

513-237-1732
www.miniloaders.com

Jo Beau® M600 GORILLA™ — Technical Specifications

Build origin: Belgium

Performance

- Maximum recommended branch diameter: 7"
- Average chip capacity: 23 yd³/h
- Average feed speed: 46 ft/min

Engine

- Brand & type: Briggs & Stratton Vanguard – 2-cylinder, 4-stroke EFI (Electronic Fuel Injection)
- Power output: 40 HP (29.9 kW)
- Fuel type: Gasoline
- Fuel consumption: 2.35 gal./hr @ 3600 rpm
- Noise level: 117 dB(A)

Design & Dimensions

- Transport position (L x W x H): 99.6 x 31.5 x 77.2"
- Working position (L x W x H): 110 x 55.1 x 86.1"
- Infeed height: Adjustable – 35 in (lowest) 49 in (medium)
- Infeed opening (W x H): 26.8 x 24.4"
- Weight: 1,885 lbs
- Chipping System

Technology: Jo Beau® Drum Technology™


- Knives: 2 hardened reversible knives
- Counter knife: 1 reversible (4 sides)
- Drum drive: Dual industrial V-belts with electromagnetic clutch
- Feed roller: "Jo Beau-Grip" top horizontal hydraulic feed roller
- Feed control: "Jo Beau Anti-Stress System" – automatic feed speed regulation

Drive & Mobility

- Track drive: Hydraulic – variable speed up to 1.7 mph
- Tracks: Stabilizing X-Tracks™ – individually extendable diagonal tracks for maximum stability
- Brakes: Hydraulic
- Fuel tank: 5.3 gal removable metal jerrycan

Construction

- Frame / hopper / discharge chute: Heavy-duty steel with powder-coat finish
- Discharge chute: 360° rotatable

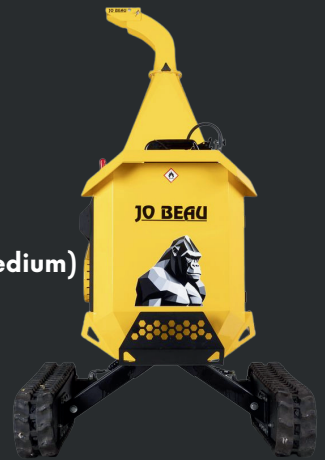

MINILOADERS.COM